



2
0
1
8



ACCESSORIES



SKIRTING



REDUCER



T-MOLDING



STAIR NOSE



SUITABLE FOR WET AREA

Lush Flooring are certified for EN 13 893 standard for slip resistance. It is made from top quality materials for long term usage purposes.



PRODUCT SERIES



588710 Butternut



588713 Oak Silver



588719 Oak Brown



588760 Oak Dark



587424 Northland Oak Grey



587425 Gordon Oak



587426 Barbarossa Oak Dark



581312 Tuscany Oak



581310 Bologna Oak



581302 Florence Oak



587428 Sessile Oak



58324-2 Sierra White
300 x 600mm




58324-3 Sierra Ash
300 x 600mm



58324-9 Sierra Grey
300 x 600mm

PRODUCT STRUCTURE

SPC FLOORING STRUCTURE

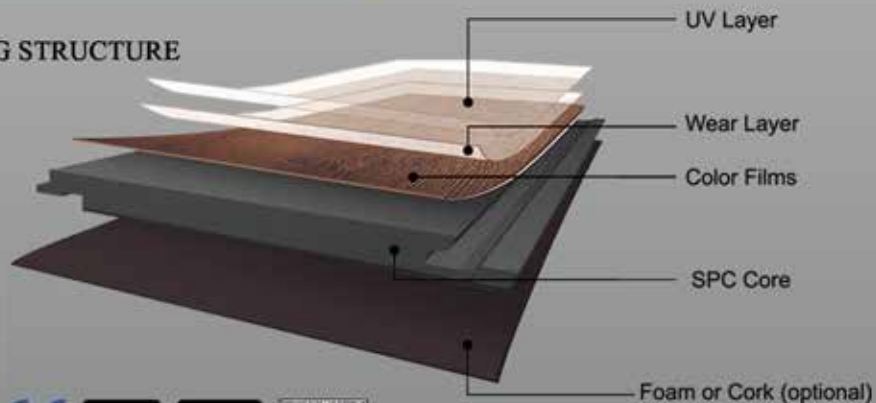

ENVIRONMENTAL FRIENDLY

Preferable as to welcome a fresh and relaxing environment in our daily life



PRODUCT INFORMATION

Plank Dimension	: 5.5mm (overall thickness) 0.3-0.5mm (wear layer thickness)
	180mm width 1218mm length
EVA Underlay	: 1.5mm (thickness) 110kg/m ³ (density) 23db (sound insulation)
Finishing	: PU coating with ceramic beads technology

PACKAGING DETAILS

Total pcs per carton	: 12pcs
Total sqm per carton	: 2.63m ²
Carton dimension	: 1235mm(length) x 190(width) x 75mm(height) = 1.075m ³
Weight per carton	: 22.5kg
Total cartons/pallet	: 50 carton per pallet (131.54m ²)

PRODUCT PROPERTIES

TEST ITEM	TEST METHOD	RESULT
Dimension Change (%)	EN ISO 10582:2012 & with reference to ISO 23999:2008	Manufacturing direction :0.14 Across-manufacturing direction :0.02
Residual indentation(mm)	EN ISO 10582:2012 & ISO 24343-1:2007	0.06
Dimensional Stability	ASTM F2199-09(R2014)	Manufacturing direction :0.033% Across-manufacturing direction :-0.164%
Fire Rating	EN130501-1:2010	Bfl-S1
Sliding Behavior	EN13893:2003	DS

ENVIRONMENT/INDOOR AIR QUALITY

Emission Test for VOC and Formaldehyde	ISO 16000-3:2011 Part 3	Pass
	ISO 16000-6:2004 Part 3	Pass
	ISO 16000-9:2006 Part 9	Pass
Phthalates Content	Organic Solvent Extraction Analyzed by GCMS	Pass

What makes LUSH RIGID CORE FLOORING so unique & revolutionary?



WARRANTY

Lush Rigid Core Flooring guarantees that the surface of floor panels will not wear off for 5 years in commercial application and 10 years for residential application if used according to the condition specified by the manufacturer.



SLIP RESISTANCE

Lush Rigid Core Flooring has been certified for EN 13893 standard for slip resistance.



100% WATERPROOF

Lush Rigid Core Flooring is made from top quality virgin resins and, because it is not constructed from wood, the floor does not swell or deform under the influence of water.



TERMITE FREE

Will not breed any dust mites, termite, or any wood worms because this flooring is not constructed from wood.



ENVIRONMENTAL FRIENDLY

Produced using virgin core as well as recycleable material. Environmentally friendly production methods.



FIRE REDUNDANT

Certified Bfl-S1 for BS EN13501 Standard for flammability and EN ISO 9239-1 Standard in determination of the initial type testing of fire.



COMMERCIAL GRADE WEAR LAYER

Lush Rigid Core Flooring comes with a high commercial grade wear layer that makes it so durable that the products can be used in both residential and commercial applications.



CLIC LOCKING SYSTEM

It has been equipped with patented CLIC System for simple and glue-less installation.




This product has been certified to meet the requirements of the flooring products certification program for indoor air quality.



FOR MORE DETAILS ARE AVAILABLE AT WWW.SCS.COM

CERT. # SCS-F5-04557



ISO 9001

ISO 14001

Quality system certified

Environmental management system certified

GLOBALNIAGA



Lot 1618, Sublot 10, Lorong 6A,
Jalan Setia Raja, Travillion @ Muara Tabuan,
Phase 2, 93350 Kuching, Sarawak, Malaysia.
Tel : 082 - 333 929 / Fax : 082 - 336 929
Email : info@globalniaga.net