

allure[®] LOCKING



2 Strip Black Walnut 66512

RESILIENT FLOORING

...has never been this easy to install.
...has never been looked this realistic.

FEATURES

DIY, no glue, no underlay.
Lay directly over your old floor.
Looks and feels like real wood.
Super durable and completely waterproof.
Free from termite.
Warm comfort and quite under foot.
Suitable for Commercial and Residential.
Scratch resistant.



The Latest Flooring Innovation From Allure
Featuring Simple Easy Clic System Installation



978109 Amsterdam Silver



978103 Amsterdam Light Tan



978104 Amsterdam Egg Shell



187214 RUSTIC MAPLE



72513 MARKHAM OAK MEDIUM



725110 MARKHAM OAK LIGHT



63696 DURBAN OAK



72516 KENTUCKY OAK

What makes ALLURE LOCKING so unique & revolutionary?



Floating System

ALLURE LOCKING is a floating floor therefore it does not need to be attached to the subfloor, just simply install it straight over most hard surfaces including ceramic tiles, timber, concrete, and even your existing vinyl floor. Underlay not required.



Warranty

VERTEX guarantees that the surface of floor panels will not wear off for 5 years in commercial application and lifetime for residential application if used according to the conditions specified by the manufacturer.



Slip Resistance

ALLURE LOCKING has been certified for DIN 51130 standard for slip resistance.



100% Waterproof

ALLURE LOCKING is made from top quality virgin resins and, because it is not constructed from wood, the floor does not swell or deform under the influence of water.



Termite Free

Will not breed any dust mites, termite, or any wood worms because this flooring is not constructed from wood.



Environmental Friendly

Produced using virgin vinyl as well as recyclable material. Environmentally friendly production methods.



Fire Resistant

Certified Bfl-S1 for BS EN13501 Standard for flammability and EN ISO 9239-1 Standard in determination of the initial type testing of fire behavior.



Commercial Grade Wear Layer

ALLURE LOCKING comes with a high commercial grade wear layer that makes it so durable that the products can be used in both residential and commercial applications.



CLIC Locking system


It has been equipped with patented CLICK system for simple and glue-less installation.



E1

Very low formaldehyde emission -E1 category it has been certified under the test standard of EN717-1 for determination of formaldehyde content.

Products specifications, structure and installation

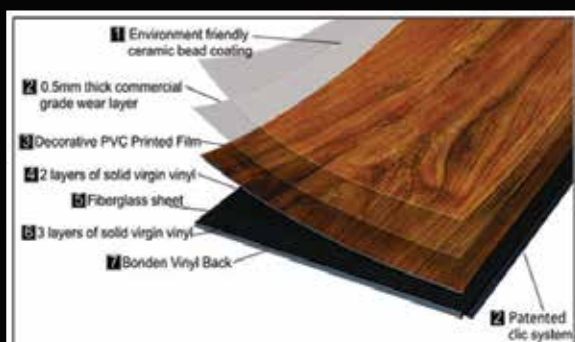

Products specifications, structure and installation

- Do-it-Yourself (DIY) concept flooring,
- Glue-less and no messy installation,
- You can use it immediately after installation,
- Underlay not required
- Cut with utility knife, no heavy tools required,
- Minimal wastage on installation.



Position the 2 planks



Angle the second plank and align the interlocking strips



Press down and lock into place