


TRUWOODS

OUTDOOR DECKING SUSPENSION SYSTEM


Dreamsystem™ | INSTALLATION SYSTEM



Please follow the steps below:

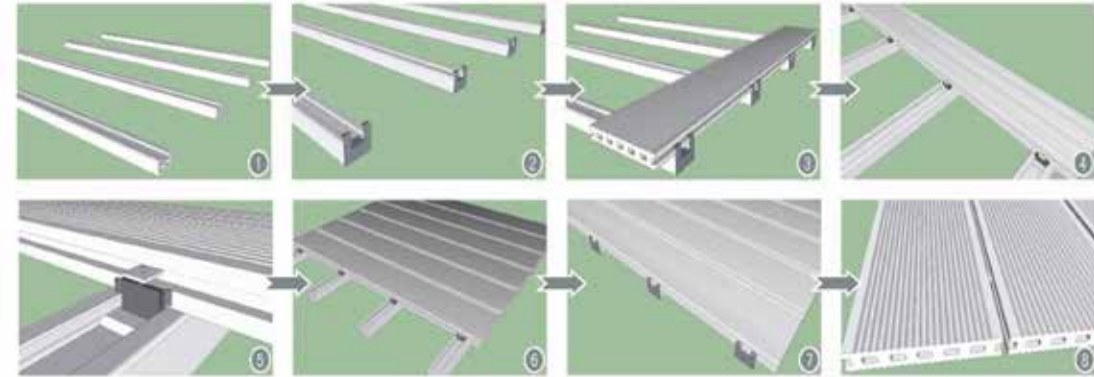

Installation guide:

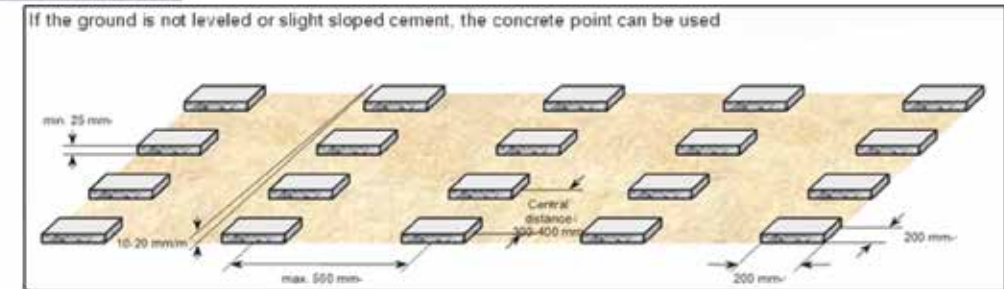

Ground and support installation

1 : The length of the keel should be less than 3m if it is fixed by keel fitter. Directly fix without keel fitter, the length should be around 2.2m.

2 : Install the keels

A : There should be a gap around 5cm between two keels, in order to avoid the expansion and allow water to go.

B : The keels should be fixed every 50cm, the distance from the end to the fix should be around 3cm.

C : The gap between keels should be around 30cm to 35cm depends on the profile and the application.

D : There must be double keel under the decking boards when there are two boards meet together.(see pic.)
The gap between two keels which are at the side of the project should be around 15cm



Attention: When there are two boards meet, and the boards meet to the wall or any others, there must be always a gap left calculated based on expansion rate and the temperature during installation.

Important: when fixing the starting clips or the connecting clips, pre-drilling with a 2.5mm bit is necessary to prevent cracking or breaking the sub structure because BPC products has high density which does not allow directly nail or screw.

Maintenance

The terrace can be cleaned with a brush/ sanding paper, or with a high pressure cleaner. If you clean the terrace with a high pressure cleaner, you must keep a distance of at least 30cm from the terrace sections. If necessary you can use a neutral soap. Make sure that the detergent doesn't attack plastic. Following is some recommendations in details:

1. Water stains

There will be some water stains on the surface of the newly installed terrace when the water evaporates after rain. It is temporary phenomenon which will disappear in about 1-2 months by itself. It can be cleaned by wiping the surface with steel wool

2. Mud, dust, etc.

Clean decking to remove dirt by using hot water with soap. Sand it with stiff bristle if needed.

3. Scratch, oil stains, alcohol stains, and cigarette stains etc. which are hard to be removed from the surface Use steel wool or sandpaper carefully to try to remove the stain. Then sand surface and clean with hot water with soap.

Pro-Innovation



Pro-Solid



Dimension

- 25 mm x 145 mm x 2200 mm
- 20 mm x 145 mm x 2200 mm

Colour

- Brown (STC 01)
- Gray (STC 02)

Walkways

Pool Surround

Restaurant

Residential

0086-159-141-1111

0086-159-141-1111

0086-159-141-1111

0086-159-141-1111

TRUWOODS

DIY DECK TILES




EASY FUN THAT'S LIFE


Decorate your balcony / porch / patio, garden / courtyard with this innovative eco-friendly wood plastic composite DIY deck tile system now available from Anhui sentai WPC. It is not only affordable but also very easy to install by yourself or even your kids!

The WPC DIY deck tile system consists of tiles that can be quickly and easily to snap together to form a very nice, neat and professional look that you will be proud of!!!

Just enjoy playing it with your family in a lovely weekend that is fun and happiness, and that is outdoor life!!!




Tiles have a grooved anti-slip surface



Stainless steel screws secure the tile to the base



The base is made from recycled PP (polypropylene) UV resistant material

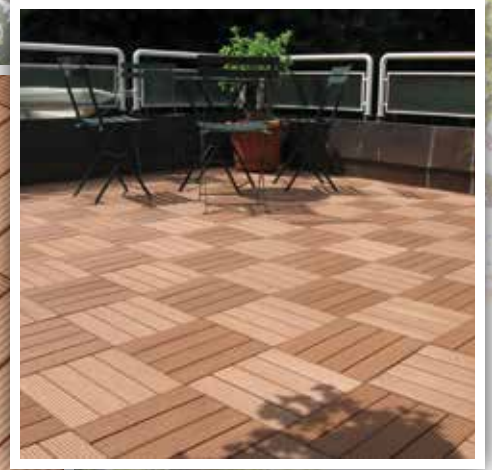

Authorized Dealers

